




Shinko

MOTORCYCLE TIRES



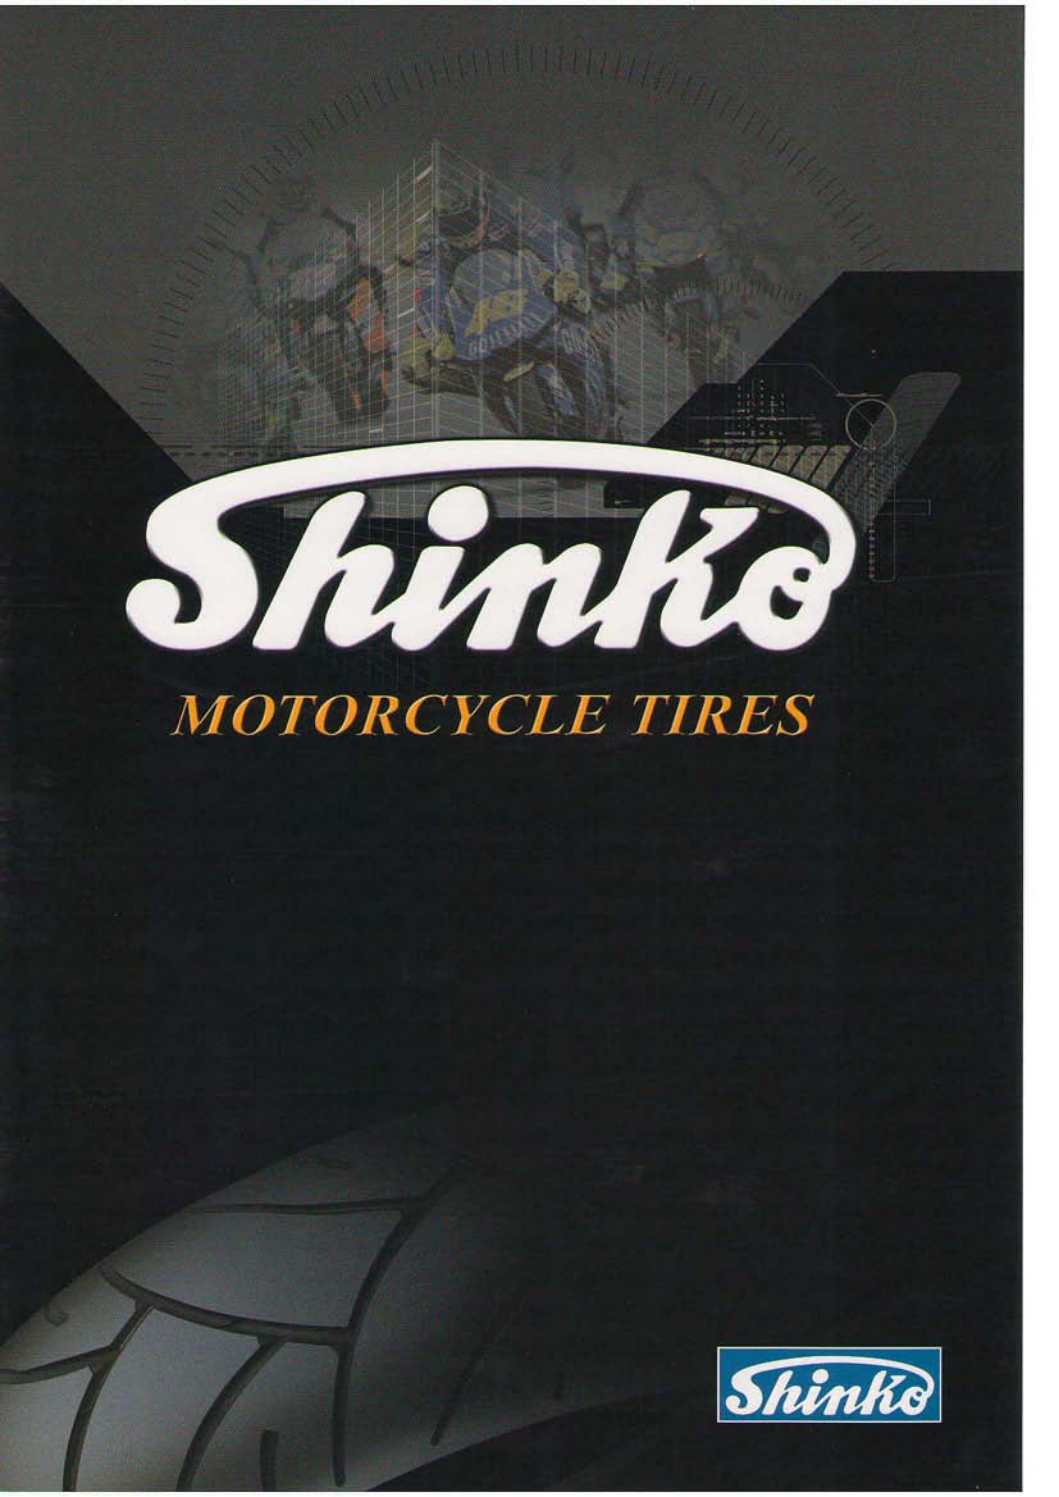

JOIN THE SHINKO TEAM

The SHINKO Company of Japan and SHIN HUNG Company of Korea have joined together to form the SHINKO TEAM, dedicated to bringing you the finest tires and tubes.

We combined advanced Japanese Technology and Superior Korean workmanship to produce a quality product which received the KS(Korean Standard) and the JIS(Japan Industrial Standard) as well as E-Mark, ISO 9001.

Our products were subjected to intensive testing and evaluation before we were allowed to display these industry marks of excellence and SHINKO has enjoyed an enviable reputation for excellence in 45 countries for over years.

Check out the line of SHINKO products with your local distributor and join the profitable SHINKO TEAM.

Improving Life and Business for Future Prosperity

RADIAL TIRES

TIRES FOR PRODUCTION RACER & STREET SPORTS RIDING

We, shinko, developed the new radial tire with highly advanced technology.

The current motorcycle of the performance depends on the highly sophisticated technology of radial motorcycle tire.

Winning the motorcycle race means to apply the high performance radial tire to your motorcycle.

The research & technology of reaction between the tire and the surface of the road is critical at the time of highly competitive racing.

The tire technology of shinko will satisfy these kinds of requirement of consumers due to the research & development team of Shinko tires for several years.

RADIAL



F005

Front



R005

Rear



F008

Front



R008

Rear

NEW 005 / 005 ADVANCE RADIAL

- Large block typed tread pattern pursue excellent braking, cornering and acceleration
- Special compound improves grip and durability
- Designed for width and angle of tread groove drain water efficiently on wet surface
- Kevlar belts upgrade the performance of high speed
- Adjusted double carcass for Front type, supply superior comfort while riding

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
F005	120/60ZR17	W	55	3.50	22.68	4.80	Y	R	F	TL	481	42
F005	120/70ZR17	W	58	3.50	23.62	4.80	Y	R	F	TL	520	42
R005	160/60ZR17	W	69	4.50	24.57	6.34	Y	R	R	TL	717	42
R005	170/60ZR17	W	72	4.50	25.04	6.61	Y	R	R	TL	783	42
R005	180/55ZR17	W	73	5.50	24.80	7.01	Y	R	R	TL	805	42
R005	190/55ZR17	W	73	6.00	24.48	7.48	Y	R	R	TL	805	42
R005	200/50ZR17	W	75	6.25	24.88	7.87	Y	R	R	TL	853	42

NEW 008 / SLICK 008 RADIAL

- Having a large tread pattern such tires provide the largest possible contact patch to the road
- Not for use on highway
- Speed Rating V type available

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
F008	120/60R17	H	55	3.50	22.68	4.80	R	F	TL	481	42
F008	120/70R17	H	58	3.50	23.62	4.80	R	F	TL	520	42
R008	150/60R17	H	66	4.00	24.09	5.86	R	R	TL	661	42
R008	160/60R17	H	69	4.50	24.57	6.34	R	R	TL	717	42
R008	180/55R17	H	73	5.50	24.80	7.01	R	R	TL	805	42
R008	190/50R17	H	73	6.00	24.48	7.48	R	R	TL	805	42

006 / PODIUM-HP RADIAL



F006

Front

R006

Rear

Designed for the characteristics of high performance of tire either on wet surface or on dry surface.

Streamline typed tread pattern improves the drainage and reduces the rotation resistance resulting in the tire at the a high speed.

Smooth profile of shoulder part was designed for securing superior grip and exceptional stability at all lean angles of high speed.

STRUCTURE OF TIRE

1. Tubeless Liner
2. Kevlar Belt
3. Kevlar Belt
4. Nylon Carcass
5. Sidewall



FRONT

6. Chaffer
7. Bead Filler
8. Bead Wire
9. Nylon Cover

1. Tubeless Liner
2. Kevlar Belt
3. Kevlar Belt
4. Nylon Carcass



REAR

5. Chaffer
6. Bead Filler
7. Bead Wire
8. Nylon Cover

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
F006	130/70ZR16	W	61	3.50	23.19	5.08	Y	R	F	TL	567	42
F006	110/70R17	V	54	3.00	23.07	4.33	Y	R	F	TL	467	42
F006	120/60ZR17	W	55	3.50	22.68	4.80	Y	R	F	TL	481	42
F006	120/70ZR17	W	58	3.50	23.62	4.80	Y	R	F	TL	520	42
F006	130/60ZR17	W	59	3.50	23.15	5.08	Y	R	F	TL	536	42
R006	140/60R17	V	63	4.00	23.62	5.55	Y	R	R	TL	600	42
R006	150/60R17	V	66	4.00	24.09	5.87	Y	R	R	TL	661	42
R006	160/60ZR17	W	69	4.50	24.57	6.34	Y	R	R	TL	717	42
R006	170/60ZR17	W	72	4.50	25.04	6.61	Y	R	R	TL	783	42
R006	180/55ZR17	W	73	5.50	24.80	7.01	Y	R	R	TL	805	42
R006	140/60R18	V	64	4.00	24.61	5.55	Y	R	R	TL	670	42
R006	150/60R18	V	67	4.00	25.08	5.87	Y	R	R	TL	677	42
R006	170/60R18	V	73	4.50	26.02	6.61	Y	R	R	TL	805	42



F009

Front

R009

Rear

009 / RAVEN. HP RADIAL

The 009 series, specifically developed to meet the demand for long life high performance radial tyres, is highly recommended for long distance touring where tyre wear is crucial. New construction provides superior riding comfort, while its new tread compound gives high grip on both dry and wet roads. Easy steering and superb cornering performance.



F003

Front

R003

Rear

003 / AVAILABLE WITH ULTRA SOFT COMPOUND

STEALTH RADIAL

The near slick dimple design has remained popular with drag racers, production racers and the serious sports rider. Compounded for rapid warm up for slick like performance.

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
F009	120/60ZR17	W	55	3.50	22.68	4.80	Y	R	F	TL	481	42
F009	120/70ZR17	W	58	3.50	23.62	4.80	Y	R	F	TL	520	42
F009	160/60ZR17	W	69	4.50	24.57	6.34	Y	R	R	TL	717	42
R009	170/60ZR17	W	72	4.50	25.04	6.61	Y	R	R	TL	783	42
R009	180/55ZR17	W	73	5.50	24.80	7.01	Y	R	R	TL	805	42
R009	190/50ZR17	W	73	6.00	24.48	7.48	Y	R	R	TL	805	42
F003	120/60ZR17	W	55	3.50	22.68	4.80	Y	R	F	TL	481	42
F003	120/70ZR17	W	58	3.50	23.62	4.80	Y	R	F	TL	520	42
R003	150/60ZR17	W	66	4.00	24.09	5.86	Y	R	R	TL	661	42
R003	170/60ZR17	W	72	4.50	24.57	6.34	Y	R	R	TL	783	42
R003	180/55ZR17	W	73	5.50	24.80	7.01	Y	R	R	TL	805	42
R003	180/55ZR18	W	74	5.50	25.78	7.00	Y	R	R	TL	827	42
R003	190/50ZR17	W	73	6.00	24.48	7.48	Y	R	R	TL	805	42
R003	200/50ZR17	W	75	6.25	24.88	7.87	Y	R	R	TL	853	42

TOURING TIRES

230 / TOUR MASTER

Our goal was to design a tire capable of carrying high loads, for long distances in wet or dry weather. In addition to achieving that goal, we added the belted construction for great handling and ride comfort. Staggered tread ignores rain grooves and offers a quiet ride.

THE PERFECT LONG DISTANCE TIRE.



F230

Front

R230

Rear

200

Staggered tread pattern ignores rain grooves while providing excellent stability. Rated to carry full loads at speeds up to 130mph for that necessary margin of safety at highway speeds. Large tread blocks resist irregular wear and provide excellent wet weather adhesion. Tubeless construction, four ply nylon carcass. Advanced dual crown radius profile offers larger footprint with smooth cornering transitions.



F200

Front

R200

Rear

TOURING

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
F230	130/90-16	V	67	3.00	25.20	5.08	Y	4	F	TL	675	42
F230	120/90-18	V	65	2.75	26.50	4.69	Y	4	F	TL	638	42
F230	3.00-18	S	47	1.85	24.69	3.15	Y	4	F	TT	385	36
F230	100/90-19	V	57	2.50	26.10	3.98	Y	4	F	TL	506	42
R230	130/90-15	V	66	3.00	24.21	5.08	Y	4	R	TL	660	42
R230	140/90-15	V	76	3.50	24.92	5.59	Y	4	R	TL	880	42
R230	150/90-15	V	80	3.50	26.02	5.91	Y	4	R	TL	992	42
R230	170/80-15	V	83	4.00	25.71	6.69	Y	4	R	TL	1071	42
R230	130/90-16	V	73	3.00	25.20	5.08	Y	4	R	TL	805	42
R230	140/90-16	V	77	3.50	25.91	5.59	Y	4	R	TL	906	42
R230	130/90-17	V	74	3.00	25.20	5.08	Y	4	R	TL	827	42
R230	120/90-18	V	71	2.75	26.50	4.69	Y	4	R	TL	761	42
R230	130/90-18	V	69	3.00	26.81	5.08	Y	4	R	TL	715	42
F230	100/90-18	V	56	2.50	25.08	3.98	Y	4	F	TL	495	42
F230	110/90-18	V	61	2.50	25.79	4.29	Y	4	F	TL	565	42
F230	110/90-19	V	62	2.50	26.81	4.29	Y	4	F	TL	583	42
F200	130/90-16	H	67	3.00	25.20	5.08	Y	4	F	TL	675	41
F200	100/90-18	H	56	2.50	25.08	3.98	Y	4	F	TL	495	41
F200	110/90-18	H	61	2.50	21.85	3.94	Y	4	F	TL	565	41
F200	90/90-19	H	52	2.15	25.39	3.54	Y	4	F	TL	440	41
F200	100/90-19	H	57	2.50	26.10	3.98	Y	4	F	TL	605	41
F200	110/90-19	H	62	2.50	26.81	4.29	Y	4	F	TL	585	41
R200	140/90-15	H	70	3.50	24.92	5.59	Y	4	R	TL	740	41
R200	150/90-15	H	74	3.50	25.63	5.91	Y	4	R	TL	825	41
R200	130/90-16	H	67	3.00	25.20	5.08	Y	4	R	TL	675	41
R200	140/90-16	H	71	3.50	25.91	5.59	Y	4	R	TL	760	41
R200	130/90-17	H	68	3.00	26.22	5.08	Y	4	R	TL	695	41
R200	120/90-18	H	65	2.75	26.50	4.69	Y	4	R	TL	640	41
R200	130/90-18	H	69	3.00	27.21	5.08	Y	4	R	TL	715	41

SPORT TOURING TIRES

712

Our best mileage and performance tire. Full four ply carcass, load range "B". Staggered, positive ratio, tread pattern ignores highway rain grooves, provides excellent wet weather adhesion, lateral groove increases in line stability. Tubeless nylon construction. H rated(130mph) for an extra safety margin at normal highway speeds.

280

"V" rated(150MPH), Kevlar® belted construction rear tires, full four ply front. Modern tread design for directional water dispersion, long mileage and even characteristics. Very stable at high loads.

110

Special compound gives excellent wet/dry grip for street sports use.

Racing style tread pattern for short warm-up time.

Dimples improves heat radiation to control rigidity for improved cornering stability and wear resistance.

kevlar belt for the rear tire boosts wear resistance.

Low profile and wider tread give better grip for fast cornering.



SR712

Front

SR712

Rear



F280

Front

R280

Rear



F110

Front

R110

Rear



SR209



SR719



SR721



SR731



SR732



SR733



SR734

NEW



SR740

NEW



SR741

NEW



SR743

SPORT TOURING

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT BEAR	TUBE TYPE	MAX LOAD	MAX PSI
712	100/90-18	H	56	2.50	25.20	4.20	Y	4	R	TL	494	40
712	100/90-18	H	56	2.50	25.20	4.20	Y	4	F	TL	494	40
712	100/90-19	H	57	2.50	26.20	4.20	Y	4	F	TL	507	40
712	110/90-18	H	61	2.50	21.65	4.29	Y	4	R	TL	567	40
712	110/90-19	H	62	2.50	26.81	4.29	Y	4	F	TL	567	40
712	120/80-16	H	60	2.75	23.80	4.90	Y	4	F	TL	551	40
712	120/80-18	H	65	2.75	26.70	5.00	Y	4	R	TL	640	40
712	130/90-16	H	67	3.00	25.40	5.30	Y	4	R	TL	667	40
712	130/90-17	H	68	3.00	26.40	5.30	Y	4	R	TL	694	40
712	140/90-15	H	70	3.50	25.00	5.80	Y	4	R	TL	739	40
712	150/70-17	H	69	4.00	25.82	6.45	Y	4	R	TL	717	40
F280	100/90-16	V	54	2.50	23.07	3.98	Y	4	F	TL	465	41
F280	100/80-17	V	52	2.50	23.31	3.98	Y	4	F	TL	440	42
F280	110/70-17	V	54	2.50	23.07	4.33	Y	4	F	TL	465	42
F280	110/80-17	V	57	2.50	23.94	4.29	Y	4	F	TL	505	42
F280	110/80-18	V	58	2.50	24.92	4.29	Y	4	F	TL	520	42
R280	120/80-17	V	61	2.75	24.57	4.69	Y	4	R	TL	565	42
R280	140/70-17	V	66	4.00	24.72	5.55	Y	4	R	TL	660	42
R280	140/70-18	V	67	4.00	25.71	5.55	Y	4	R	TL	677	42
R280	150/70-17	V	69	4.00	25.28	5.87	Y	4	R	TL	715	42
F110	100/90-19	V	57	2.50	26.20	4.20	Y	4	F	TL	560	42
F110	100/90-18	V	56	2.50	25.20	4.20	Y	4	F	TL	490	42
F110	110/80-18	V	61	2.50	26.81	4.29	Y	4	F	TL	565	42
R110	120/90-18	V	71	2.75	26.70	5.00	Y	4	R	TL	761	42
R110	130/90-17	V	74	3.00	26.40	5.39	Y	4	R	TL	827	42
R110	130/80-18	V	66	3.00	26.18	5.59	Y	4	R	TL	715	42
R110	130/70-17	V	62	3.50	24.17	5.59	Y	4	R	TL	584	42
209	130/70-18	V	63	3.50	25.15	5.07	Y	4	R	TL	600	42
209	110/80-17	V	57	2.50	23.93	4.29	Y	4	F	TL	507	42
719	130/90-16	H	67	2.75	25.19	5.07	Y	4	R	TL	667	40
721	130/90-16	H	67	3.00	25.32	5.59	Y	4	R	TL	677	40
721	110/90-18	H	61	2.50	26.30	4.72	Y	4	F	TL	567	40
721	130/90-17	H	68	3.00	26.85	5.59	Y	4	R	TL	694	40
731	120/90-17	H	64	2.75	25.51	4.68	Y	4	R	TL	617	41
732	120/90-16	H	63	2.75	24.48	4.68	Y	4	R	TL	551	40
733	130/70-18	H	63	3.50	25.15	5.07	Y	4	F	TL	600	40
734	160/80-16	H	75	4.00	26.06	6.37	Y	4	R	TL	853	40
734	130/90-15	P	66	3.00	24.21	5.07	Y	4	R	TL	660	33
734	150/80-15	S	70	3.50	25.07	6.49	Y	4	R	TL	739	33
740	110/70-17	H	54	3.00	23.07	4.76	Y	4	F	TL	467	40
741	150/70-17	H	69	4.25	25.27	6.53	Y	4	R	TL	717	40
743	150/80-16	H	71	3.50	25.43	6.49	Y	4	R	TL	761	42

HARLEY DAVIDSON TIRES

NEW



SR777

SR777 / New pattern developed for Harley Davidson

130/90-16 AVAILABLE BOTH WHITEWALL AND BLACKWALL

250

Modern directional tread design for excellent wet weather adhesion and long stable mileage. Advanced Kevlar® breaker adds stability at high loads. Front tire has single radius profile for light steering and increased stability. Rear tire uses dual radius profile for larger foot print, increased traction and mileage.

AVAILABLE BOTH WHITEWALL AND BLACKWALL.



F250

Front



R250

Rear

240 / TIRES FOR HD CLASSIC MOTORCYCLES CLASSIC 240

Compounded for long mileage. Kevlar® breaker offsets tread distortion for better grip and durability. 90% aspect ratio, classic profile and tread pattern.

AVAILABLE BOTH WHITEWALL AND BLACKWALL.



E240



E270

270 / SUPER CLASSIC 270

The classic full aspect ratio sawtooth design. Full four ply nylon carcass for extended wear with classic appearance.

AVAILABLE IN BOTH WHITEWALL AND BLACKWALL.

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
F250	MT90-16	H	73	3.00	25.59	5.12	Y	4	F	TL	805	41
F250	MM90-19	H	61	2.15	26.30	3.74	Y	4	F	TL	567	36
F250	MJ90-19	H	56	2.15	25.59	3.54	Y	4	F	TL	494	33
F250	MH90-21	H	56	1.85	27.01	3.15	Y	4	F	TT	495	41
R250	MT90-16	H	74	3.00	25.59	5.12	Y	4	R	TL	827	41
E240	MT90-16	H	74	3.00	25.59	5.12	Y	4	B	TT	830	41
E270	MT90-16	H	74	3.00	25.59	5.12	Y	4	B	TT	830	41
E270	5.00-16	S	69	3.00	26.38	5.12	Y	4	B	TT	716	33
SR777	90/90-21	H	54	2.15	27.36	3.54	Y	4	F	TL	465	42
SR777	130/90-16	H	67	3.00	25.19	5.07	Y	4	B	TL	675	42
SR777	130/90-16	H	73	3.00	25.19	5.07	Y	6	B	TL	805	49
SR777	140/90-16	H	71	3.50	25.90	5.59	Y	4	R	TL	761	42
SR777	150/80-16	H	71	3.50	25.43	5.90	Y	4	R	TL	761	42

DUAL SPORT TIRES



E705

705 / HIGH SPEED DUAL SPORT 705 TRAIL MASTER

DOT approved, H rated(130mph) dual sport tires designed for 75% street 25% trail riding. Aggressive tread pattern provides excellent wet and dry weather adhesion. Compound Resists tearing while off road. Four ply nylon construction. Except 410-18 and 275-21 which are P rated.



SR244

244 / DUAL SPORT 244 SERIES

DOT approved for on or off highway use. Aggressive pattern for off highway use. Full four ply nylon construction.

■ AVAILABLE WITH SIX PLY NYLON(6PR)

DUAL SPORT

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
E705	120/90-17	H	64	2.75	25.51	4.67	Y	4	B	TT	617	41
E705	130/80-17	H	65	3.00	25.20	5.08	Y	4	B	TL	639	41
E705	130/90-17	H	68	3.00	26.22	5.08	Y	4	B	TT	694	41
E705	140/80-17	H	69	3.50	25.83	5.59	Y	4	B	TT	715	41
E705	120/80-18	H	62	2.75	25.55	4.69	Y	4	B	TT	585	41
E705	4.10-18	P	59	2.50	25.16	4.09	Y	4	B	TT	595	33
E705	2.75-21	P	45	1.85	27.13	2.90	Y	4	B	TT	364	33
E705	90/90-21	H	54	2.15	27.36	3.54	Y	4	B	TL	465	41
244	2.50-19	L	41	1.50	24.30	2.50	Y	4	B	TT	320	33
244	2.50-21	P	43	1.50	26.30	2.50	Y	4	B	TT	342	33
244	2.75-14	P	35	1.85	20.16	2.90	Y	4	B	TT	267	33
244	2.75-19	P	43	1.85	25.16	2.90	Y	4	B	TT	370	32
■ 244	2.75-21	P	45	1.85	27.10	2.90	Y	4	B	TT	342	33
244	3.00-16	P	45	1.85	22.67	3.15	Y	4	B	TT	364	32
244	3.00-17	P	45	1.85	23.10	3.15	Y	4	B	TT	364	33
■ 244	3.00-18	L	47	1.85	24.60	3.15	Y	4	B	TT	386	32
■ 244	3.00-21	L	51	1.85	27.60	3.15	Y	4	B	TT	430	33
244	3.25-18	P	53	1.85	25.16	3.50	Y	4	B	TT	455	32
■ 244	3.50-18	P	56	2.15	25.55	4.25	Y	4	B	TT	494	32
■ 244	4.10-18	S	60	2.15	26.60	4.60	Y	4	B	TT	536	33
■ 244	4.60-17	P	62	2.75	24.80	4.40	Y	4	B	TT	584	33
■ 244	4.60-18	P	63	2.15	25.74	4.60	Y	4	B	TT	593	33
244	5.10-17	P	67	3.00	25.62	5.07	Y	4	B	TT	677	33
244	5.10-18	P	58	3.00	26.61	5.07	Y	4	B	TT	694	32
244	2.50-17	L	38	1.50	22.36	2.50	Y	4	B	TT	291	33

NEW

NEW



SR428

Front



SR428

Rear



700/703/704/722

DUAL SPORT 700, 703, 704, 722 TRAIL MASTER

DOT approved. Aggressive tread for off road performance, round profile for smooth cornering on the street. Four ply nylon construction - some sizes available tubeless. For best performance, use in matched pairs.



E700



E703



E704



SR722

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
428	130/80-18	P	66	3.00	26.14	4.84	Y	4	F	TT	661	33
428	180/80-14	P	78	4.50	25.35	7.08	Y	4	R	TT	937	33
E700	4.60-17	P	62	2.15	24.76	4.37	Y	4	B	TT	575	33
E700	5.10-17	S	67	3.00	25.63	5.08	Y	4	B	TL	677	33
E700	4.60-18	S	63	2.75	25.75	4.37	Y	4	B	TT	595	36
E700	3.00-21	S	51	1.85	27.87	3.15	Y	4	B	TL	430	32
E703	130/80-17	S	65	3.00	25.20	5.08	Y	4	B	TL	639	36
E703	90/90-21	S	54	2.15	27.36	3.54	Y	4	B	TT	467	36
E704	120/80-18	P	62	2.75	25.55	4.69	Y	4	B	TT	584	33
E704	4.10-18	P	59	2.50	25.16	4.09	Y	4	B	TT	536	33
E704	4.60-18	S	63	2.75	25.75	4.37	Y	4	B	TT	595	33
E704	2.75-21	P	45	1.85	27.10	2.90	Y	4	B	TT	363	33
E704	3.00-21	P	51	1.85	27.60	3.15	Y	4	B	TT	430	33
722	110/90-18	T	61	2.50	25.16	2.90	Y	4	R	TT	370	33
722	80/90-21	T	48	1.85	27.13	2.90	Y	4	F	TT	364	33

OFF ROAD TIRES

- Tires only for moto-cross racing.
- Not for use on a normal road or highway
- Adopting hard, high carbon compound for extreme motocross competition, select one of four types of superb performance motocross tire on a wide range of terrain, from soft to intermediate, even extremely rough.

TERRAIN TABLE FOR EACH TIRES

	EXTREMELY	ROUGH	SOFT	MUD, SAND
500A, 502	←→			
504, 505	←→	←→		
524, 525			←→	←→
540				←→
520A	←→	←→	←→	
522, 523	←→	←→	←→	




F540
Front




R540
Rear

STRUCTURE OF TIRE



① Designed for exceptional grip and excellent stability on both dry and wet condition (R500, R520)

② Specifically deepened block secures excellent traction on muddy condition.



BLOCK ARRANGEMENT (R540)

- ① Specific block to secure the excellent traction in all directions
- ② Specific block to increase a grip at all lean angles.

HOLESHOT.MS.MUD/SAND/DEEP LOAM ONLY

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
F540	70/100-17	M	40	1.60	22.84	2.72	N	F	TT	309	33
F540	80/100-21	M	51	1.85	27.56	3.15	N	F	TT	430	33
R540	90/100-14	M	49	2.15	21.65	3.54	N	R	TT	408	33
R540	100/100-18	M	59	2.50	25.95	3.98	N	R	TT	536	33
R540	110/100-18	M	64	2.50	26.73	4.33	N	R	TT	617	33
R540	120/100-18	M	68	2.75	27.52	4.69	N	R	TT	694	33
R540	100/90-19	M	57	2.50	26.38	3.98	N	R	TT	507	33
R540	110/90-19	M	62	2.50	26.97	4.29	N	R	TT	584	33
R540	120/90-19	M	66	2.75	27.48	4.69	N	R	TT	694	33
R540	90/100-16	M	51	2.15	23.07	3.54	N	R	TT	430	33
F540	70/100-19	M	42	1.60	24.52	2.72	N	F	TT	331	33



R523



R520A



F524



R525

HOLESNOT IT. INTERMEDIATE TERRAIN R520A, R523 SOFT TERRAIN F524, R525

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
R523	100/100-18	M	59	2.50	25.95	3.98	N	R	TT	536	33
R523	110/100-18	M	64	2.50	26.73	4.29	N	R	TT	617	33
R523	100/90-19	M	57	2.50	26.38	3.98	N	R	TT	507	33
R523	110/90-19	M	62	2.50	26.97	4.29	N	R	TT	584	33
R523	120/90-19	M	66	2.75	27.48	4.69	N	R	TT	661	33
R520A	90/100-14	M	49	2.15	21.65	3.54	N	R	TT	408	33
F520A	80/100-21	M	51	1.85	27.56	3.15	N	F	TT	430	33
R520A	110/90-19	M	62	2.50	26.97	4.29	N	R	TT	584	33
R520A	110/100-18	M	64	2.50	26.73	4.29	N	R	TT	617	33
R520A	120/100-18	M	68	2.75	27.52	4.69	N	R	TT	694	33
F520	70/100-17	M	40	1.60	22.84	2.76	N	F	TT	309	33
F524	80/100-21	M	51	1.85	27.56	3.15	N	F	TT	430	33
R525	100/100-18	M	59	2.50	21.85	3.15	N	R	TT	536	33
R525	110/100-18	M	64	2.50	26.58	4.33	N	R	TT	617	33
R525	100/90-19	M	57	2.50	26.38	3.94	N	R	TT	507	33
R525	110/90-19	M	62	2.50	26.77	4.33	N	R	TT	507	33


R505

F502

F504

R500A

SR248

SPECIAL FOR MINI-CROSS


SR520

2.50-10 Front
2.75-10 Rear
2.50-12 Both

OFF ROAD

HOLESHOT HT. HARD TERRAIN F502, F504, R505, R505A

SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
F502	70/100-17	M	40	1.60	22.84	2.76	N	F	TT	309	33
F504	80/100-21	M	51	1.85	27.56	3.15	N	F	TT	430	33
R505	100/100-18	M	59	2.50	25.95	3.98	N	R	TT	536	33
R505	110/100-18	M	64	2.50	26.73	4.33	N	R	TT	617	33
R505	100/90-19	M	57	2.50	26.38	3.98	N	R	TT	507	33
R505	110/90-19	M	62	2.50	26.97	4.29	N	R	TT	584	33
R505	120/90-19	M	66	2.75	23.54	4.69	N	R	TT	661	33
R505	90/100-14	M	49	2.15	21.65	3.54	N	R	TT	408	33
R500A	120/100-18	M	68	2.75	27.52	4.69	N	R	TT	694	33
248	3.00-21	P	51	1.85	27.90	3.50	N	F	TT	455	32
248	3.50-18	P	56	2.15	26.60	4.40	N	R	TT	364	33
248	4.10-14	P	52	2.15	21.40	4.30	N	R	TT	394	32
248	4.10-18	P	59	2.15	26.60	4.70	N	F	TT	536	33
248	4.60-18	P	63	2.15	26.60	5.00	N	R	TT	600	33
248	5.10-18	P	68	2.50	29.00	5.10	N	R	TT	694	33
248	100/90-19	P	61	2.50	26.38	3.94	N	F	TT	507	32
248	110/90-19	P	62	2.50	27.20	5.00	N	R	TT	567	32
248	4.60-17	P	62	2.15	24.76	4.37	N	B	TT	584	33

TRIALS TIRES



Tough nylon carcass and extra high dimpled knobs provide versatility in a variety of terrains. Open patterns clean in mud. Extra edges provide the needed bite for hard terrain. Available in all popular sizes.



SR	SIZE	SPEED RATING	LOAD INDEX	RECOM RIM	OVERALL DIAMETER	WIDTH	DOT	PLY RATING	FRONT REAR	TUBE TYPE	MAX LOAD	MAX PSI
241	2.50-15	L	34	1.60	20.35	2.50	Y	4	B	TT	260	33
241	2.50-17	L	38	1.50	22.36	2.50	Y	4	B	TT	291	33
241	2.50-18	L	40	1.50	23.34	2.50	Y	4	B	TT	319	32
241	2.50-21	P	43	1.50	26.30	2.50	Y	4	B	TT	342	32
241	2.75-14	P	35	1.85	20.16	2.90	Y	4	B	TT	267	33
241	2.75-15	P	39	1.85	21.14	2.90	Y	4	B	TT	320	32
241	2.75-18	P	42	1.85	24.13	2.90	Y	4	B	TT	331	33
241	23/4-17	P	38	1.85	22.99	2.90	Y	4	B	TT	291	36
241	2.75-19	P	43	1.85	25.16	2.90	Y	4	B	TT	342	33
241	2.75-21	P	45	1.85	27.13	2.90	Y	4	B	TT	364	32
241	3.00-12	J	42	2.10	18.26	3.15	Y	4	B	TT	390	36
241	3.00-16	P	45	1.85	22.67	3.15	Y	4	B	TT	355	32
241	3.00-17	P	45	1.85	23.70	3.15	Y	4	B	TT	364	33
241	3.00-18	P	47	1.85	24.68	3.15	Y	4	B	TT	386	32
241	3.00-21	P	51	1.85	27.67	3.15	Y	4	B	TT	430	33
241	3.25-18	P	52	2.15	25.16	3.50	Y	4	B	TT	441	33
241	3.50-18	P	56	2.15	25.55	3.66	Y	4	B	TT	494	32
246	3.50-18	P	56	2.15	25.55	3.66	Y	4	B	TT	394	32
421	3.00-10	J	42	2.10	16.65	3.15	Y	4	B	TT	330	36
421	3.50-10	J	51	2.50	17.20	3.62	Y	4	B	TT	330	36
421	3.50-8	J	46	2.50	15.19	3.62	Y	4	B	TT	375	36
421	4.00-8	J	54	2.50	16.33	4.13	Y	4	B	TT	474	36

STREET TIRES



SR	SIZE	SPEED RATING	LOAD INDEX	PLY RATING	FRONT REAR	TUBE TYPE
200	2.25-17	L	33	4	F	TT
200	2.75-14	P	35	4	F	TT
200	2.75-18	P	42	4	F	TT
201	2.75-17	P	41	4	F	TT
201	3.00-18	P	47	4	F	TT
201	3.25-19	P	54	4	F	TT
202	2.25-17	L	33	4	F	TT
203	2.25-14	L	27	4	F	TT
205	2.25-17	L	33	4	F	TT
205	2.50-17	L	38	4	F	TT
205	2.50-18	L	40	4	F	TT
206	2.25-17	L	33	4	R	TT
206	2.50-17	P	38	4	R	TT
206	2.50-18	L	40	4	R	TT
206	2.50-16	L	36	4	R	TT
206	2.75-14	P	35	4	R	TT
206	2.75-16	P	40	4	R	TT
206	2.75-18	P	42	4	R	TT
207	2.50-17	L	38	4	R	TT
207	2.50-19	L	41	4	R	TT
208	2.75-14	P	35	4	R	TT
208	2.75-17	P	41	4	R	TT
208	3.00-18	P	47	4	R	TT
208	3.25-14	P	45	4	R	TT
208	3.25-16	P	48	4	R	TT
210	2.50-15	L	34	4	R	TT
210	2.75-18	P	42	4	R	TT
210	3.00-16	P	43	4	R	TT
210	3.00-17	P	45	4	R	TT
210	3.00-18	P	47	4	R	TT
210	3.00-19	P	49	4	R	TT
210	3.50-18	P	56	4	R	TT
210	3.50-19	P	57	4	R	TT
211	2.25-17	L	33	4	F	TT
212	2.75-18	P	42	4	F	TT
213	2.75-18	P	42	4	R	TT
214	2.75-18	P	42	4	R	TT



■ SNOW TIRE



SR215

SR216

SR217

SR220

SR243



SR305

SR601

SR602

SR603

SR604



SR607

SR609



SR610

SR612

SR	SIZE	SPEED RATING	LOAD INDEX	PLY RATING	FRONT REAR	TUBE TYPE
215	3.00-18	P	47	4	R	TT
216	3.25-16	P	48	4	R	TT
216	3.25-18	P	52	4	R	TT
216	3.50-16	P	52	4	R	TT
217	2.25-14	P	27	4	R	TT
220	3.75-18	S	60	4	R	TT
220	4.00-18	P	64	4	R	TT
242	4.00-18	P	64	4	R	TL
■ 243	2.25-17	L	33	4	B	TT
■ 243	2.50-17	L	38	4	B	TL
■ 243	2.75-14	P	35	4	B	TT
■ 243	80/100-16	P	45	4	B	TL
305	2.50-17	L	38	4	B	TT/TL
305	3.00-17	P	45	4	B	TL
601	2.50-17	L	38	4	F	TT
602	3.00-17	P	45	4	F	TT
604	3.00-18	P	47	4	F	TT
607	2.75-18	P	42	4	F	TT
609	90/90-17	P	49	4	F	TL
610	90/90-18	P	51	4	F	TL
610	70/100-16	P	40	4	F	TL
610	2.50-17	L	38	4	F	TL
612	90/90-18	P	51	4	F	TL

STREET TIRES



SR701



SR702



SR703



SR704



SR705



SR706



SR707



SR708



SR709



SR710



SR711



SR713



SR714



SR715

SR	SIZE	SPEED RATING	LOAD INDEX	PLY RATING	FRONT	REAR	TUBE TYPE
701	2.50-17	L	38	4	R	R	TT
701	2.50-18	L	40	4	R	R	TT
702	3.00-17	P	45	4	R	R	TT
703	3.00-14	P	40	4	R	R	TT
703	3.00-18	P	47	4	R	R	TT
704	2.25-17	L	33	4	R	R	TT
705	3.00-18	P	47	4	R	R	TT
706	2.75-14	P	35	4	R	R	TT
706	3.00-17	P	45	4	R	R	TT
706	3.00-18	P	47	4	R	R	TT
707	2.75-14	P	35	4	R	R	TT
707	2.50-17	L	38	4	R	R	TT
707	2.50-17	L	43	6	R	R	TT
708	2.75-18	P	42	4	R	R	TT
709	2.75-17	P	41	4	R	R	TL
709	2.75-18	P	42	4	R	R	TL
709	3.00-18	P	47	4	R	R	TL
709	3.25-18	P	52	4	R	R	TL
710	3.50-18	P	56	4	R	R	TL
710	4.10-18	P	59	4	R	R	TL
711	2.50-17	L	38	4	R	R	TT
711	2.50-17	L	43	6	R	R	TT
713	360H18	H	51	4	B	B	TL
713	80/90-18	P	45	4	B	B	TL
714	80/80-16	P	45	4	B	B	TL
714	90/80-16	P	51	4	B	B	TL
714	2.25-16	L	31	4	B	B	TT
714	3.25-16	P	48	4	B	B	TT
715	80/100-16	P	45	4	B	B	TL



SR716



SR717



SR720



SR723



SR724



SR564



SR566



SR735



SR736



SR737

■ SNOW TIRE



SR745



SR742



SR567



SR568

SR	SIZE	SPEED RATING	LOAD INDEX	PLY RATING	FRONT REAR	TUBE TYPE
716	110/90-16	P	59	4	B	TL
716	100/90-17	P	55	4	B	TL
717	110/90-16	P	59	4	B	TL
720	80/100-16	P	45	4	B	TL
723	2.75-16	P	40	4	B	TL
724	3.00-16	P	43	4	B	TL
564	110/90-16	P	59	4	R	TL
566	110/90-16	P	59	4	R	TL
735	110/90-16	P/S	59	4	B	TL
736	2.75-17	P	41	4	B	TL
737	100/90-17	P	55	4	F	TT
742	3.00-16	P	48	4	B	TL
742	2.75-17	P	47	4	B	TL
742	130/70-12	P	56	4	B	TL
744	2.50-17	L	38/43	4 / 6	F	TL
745	2.75-17	P	41/47	4 / 6	B	TL
738	2.75-18	P	42	4	B	TL
567	120/70-14	S	55	4	F	TL
567	110/70-16	S	52	6	F	TL
567	110/80-16	S	55	4	F	TL
568	140/60-14	S	64	4	R	TL
568	150/70-14	S	66	4	R	TL
568	100/80-16	P	50	4	R	TL
568	120/80-16	P	60	4	R	TL
568	130/80-16	P	64	4	R	TL
568	140/70-16	S	65	4	R	TL

SCOOTER TIRES

■ SNOW TIRE



SR	SIZE	SPEED RATING	LOAD INDEX	PLY RATING	FRONT REAR	TUBE TYPE
006	120/70-12	J	56	4	F	TL
006	130/70-12	J	59	4	R	TL
007	110/90-12	P	64	4	F	TL
007	130/70-12	P	62	4	F	TL
007	140/70-12	P	60	4	R	TL
007	130/70-11	L	60	4	R	TL
007	120/70-11	L	50	4	R	TL
009	110/70-12	J	47	4	F	TL
009	120/70-12	J	51	4	R	TL
009	3.50-10	J	51	4	B	TL
■ 243	3.00-10	J	42	4	B	TL
400	2.50-10	J	33	4	B	TT
400	2.75-10	J	38	4	B	TT
401	3.00-10	J	42	4	B	TT
401	3.00-12	J	47	4	B	TT
402	3.50-8	J	46	4	B	TT
402	3.50-10	J	51	4	B	TT
402	3.50-12	J	56	4	B	TT
402	4.00-8	J	55	4	B	TT
402	4.00-10	J	60	4	B	TT
403	4.00-8	J	55	4	B	TT
405	3.00-10	J	42	4	B	TT
406	3.00-10	J	42	4	B	TT
407	3.50-10	J	51	4	B	TT
408	2.75-10	J	38	4	B	TT
408	3.00-10	J	42	4	B	TT
410	3.00-8	J	38	4	B	TT
412	3.00-10	J	42	4	B	TT
422	3.50-8	J	46	4	B	TT
424	3.00-10	J	42	4	F	TT
424	3.50-10	J	51	4	R	TT

SCOOTER

SR425



SR426



SR428



SR429



SR500



SR501



SR560



SR561



SR562



SR564



SR565



SR566



SR723



SR723



SR	SIZE	SPEED RATING	LOAD INDEX	PLY RATING	FRONT REAR	TUBE TYPE
425	3.00-10	J	42	4	F	TT
425	3.50-10	J	51	4	F	TT
425	90/90-10	J	50	4	R	TL
425	100/80-10	J	53	4	R	TL
425	100/90-10	J	56	4	R	TL
425	110/80-10	J	58	4	F	TL
425	120/90-10	J	66	4	R	TL
425	130/90-10	J	70	4	B	TL
425	130/60-13	J	53	4	B	TL
425	130/70-10	J	52	4	B	TL
426	3.00-10	J	42	4	B	TL
426	3.50-10	J	51	4	B	TL
426	100/80-10	J	53	4	B	TL
426	120/90-10	J	66	4	B	TL
426	130/90-10	J	70	4	B	TL
426	120/70-12	P	51	4	B	TL
426	130/70-12	P	61	4	B	TL
426	130/60-13	L	53	4	B	TL
428	120/70-12	J	51	4	B	TL
428	130/70-12	J	56	4	B	TL
429	130/60-13	J	53	4	B	TL
500	4.00-8	J	55	4	B	TT
501	4.00-8	J	55	4	B	TT
560	3.50-10	J	51	4	B	TL
560	80/90-10	J	44	4	B	TL
560	90/90-10	J	50	4	B	TL
561	100/90-10	J	56	4	B	TL
562	100/90-10	J	56	4	B	TL
564	90/90-10	J	50	4	B	TL
565	100/80-10	L	53	4	B	TL
565	120/70-10	L	48	4	B	TL
566	90/90-10	J	50	4	B	TL
723	120/70-12	P	58	4	F	TL
723	130/70-12	P	62	4	R	TL

SCOOTER TIRES

NEW



SR550

WHITE WALL

NEW



SR567

SR	SIZE	SPEED RATING	LOAD INDEX	PLY RATING	FRONT REAR	TUBE TYPE
550	3.00-10	J	50	6	B	TT
550	3.50-10	J	59	6	B	TT
550	3.50-8	J	46	4	B	TT
550	4.00-8	J	55	4	B	TT
550	4.00-10	J	69	6	B	TT
567	110/90-13	P	56	4	F	TL
567	120/70-13	P	53	4	F	TL
568	140/60-13	P	63	4	R	TL
568	130/70-13	P	63	4	R	TL
568	130/60-13	P	60	4	R	TL

NEW



SR568



RACING KART TIRES

NEW



SR508

Front

NEW



SR508

Rear

PATTERN	TIRE SIZE	RIM WIDTH(inch) RANGE	STANDARD	OVERALL DIAMETER	WIDTH
F508	3.6x10.0-5	3.5-5	4	252	117
F508	4.5x10.0-5	4-5.5	4.5	255	133
R508	6.0x11.0-5	5-7	6	278	165
R508	7.1x11.0-5	7-8.5	8	276	206

GOLF CAR TIRES & GARDEN TIRES



SR852

13 × 6.50-6
16 × 6.50-8
18 × 8.50-8



SR853

15 × 6.00-6
18 × 9.50-8



SR854

18 × 8.50-8



SR855

13 × 5.00-6 15 × 6.00-6
14 × 5.00-6 16 × 6.50-8
14 × 6.00-6 18 × 8.50-8



SR856

18 × 8.50-8



SR857

18 × 8.50-8



SR858

16.5 × 6.50-8
18.5 × 8.50-8
20.5 × 8.0-10



SR859

18 × 8.50-8

NEW



SR933

18 × 8.50-8

ATV TIRES



SR951

20 x 7-8



SR952

22 x 10-8



SR953

145/70-6



SR954

22 x 11-8

TIRE SIZE	PT. NO.	DESIGN RIM WIDTH(inch)	DESIGN WIDTH(inch)	OVERALL DIAMETER	DESIGN RIM WIDTH(inch)	FRONT REAR
20X7-8	SR951	5.5	7.2	20.0	5	F
22X10-8	SR952	8.0	10.0	22.0	5	R
145/70-6	SR953	4.5	5.7	14.25	5	B
22X11-8	SR954	8.5	10.88	22.0	5	R



SR900

Front

The first ATV tire designed with the titan name, the SR 900 provides reliable traction under virtually any condition. The efficient, self-cleaning tread design is the key in this high flotation tire.

TIRE SIZE	LOAD SYMBOL OR PLY RATING	DESIGN RIM WIDTH(inch)	DESIGN WIDTH(inch)	OVERALL DIAMETER	DESIGN RIM WIDTH(inch)	FRONT REAR
AT23X8-11	6PR★★★	6.5	7.5	23.7	7	F
AT24X8-11	6PR★★★	6.0	8.4	24.5	7	F
AT25X8-12	6PR★★★	6.5	7.7	24.7	7	F



SR901

Rear

The perfect complement to the SR901, the tire provides excellent all-around traction in 2WD and 4WD applications.

TIRE SIZE	LOAD SYMBOL OR PLY RATING	DESIGN RIM WIDTH(inch)	DESIGN WIDTH(inch)	OVERALL DIAMETER	DESIGN RIM WIDTH(inch)	FRONT REAR
AT24X9-11	6PR★★★	7.0	8.7	25.0	7	R
AT24X10-11	6PR★★★	8.0	9.6	24.4	7	R
AT25X12-9	6PR★★★	9.5	11.2	25.3	7	R
AT25X10-12	6PR★★★	8.0	9.5	24.7	7	R
18X7.00-7	4PR	5.5	6.6	16.5	7	B



Shin Hung Co., Ltd.

156-1, Sang Pyung-Dong, Jinju City,

Kyung Nam, South Korea

Tel: (055)752-6511

Fax: (055)752-6535

<http://www.shinkotire.co.kr>

E-mail: shinko@kornet.net

Shinko Co., Ltd.

147, 3-Chome, Takochi-Higashi,

Yao City, Osaka 581-0053, Japan

Tel: (06)6709-6661

Fax: (06)6709-6652

Kyushu Shinko Co., Ltd.

1945-1, Onza, Takajo-cho, Kitamorogata,

Miyazaki 885-1203, Japan

Tel: (0986)58-2560

Fax: (0986)58-3736

Jinzhou Xinxing Rubber Production Co., Ltd.

China Liaoning Jinzhou Economic Development Experiment Zone

Investment Bureau, 121221, China

Tel: (0416)790-0661

Fax: (0416)790-0667